


Crosby® Kuplex®


Special Purpose Slings



Two-leg Basket Sling

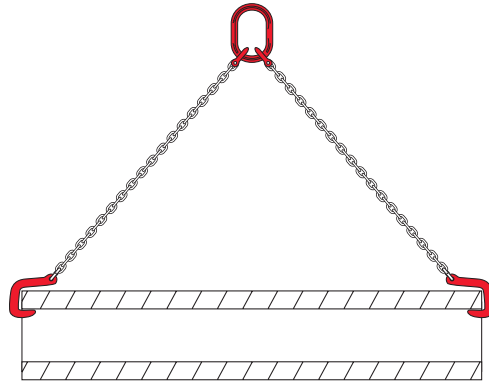

Pipe Sling

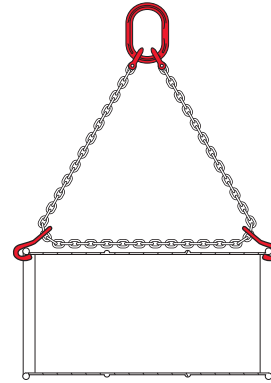

Drum Sling

Master Links



KMML
7mm - 32mm



KM
7mm - 32mm



KAL
7mm - 19mm

Kupler



K N
7mm - 32mm


Shortening Clutch







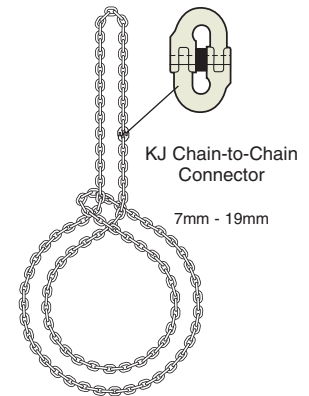

KSC N
7mm - 19mm



KSC
7mm - 32mm



Terminal Fittings - Availability Chart

Chain Dia. (mm)	Grade	Working Load Limit (t.)						
		 KPH10 USED IN PAIRS	 KD USED IN PAIRS	 KB		 SINGLE BASKET	 ENDLESS DOUBLE BASKET	 IN CHOKE
7	8	-	1.5	1.5	2.12	2.12	3.15	2.5
7	10	-	2.0	2.0	2.8	2.8	4.2	-
8	8	-	2.0	2.0	2.8	2.8	4.2	3.2
10	8	4.25	-	-	-	4.25	6.7	5
10	10	5.6	-	-	-	5.6	8.4	-
13	8	Note: Sling rated at minimum 30° from the vertical (60° included angle) MUST BE USED IN PAIRS	Note: Sling rated at minimum 30° from the vertical (60° included angle) MUST BE USED IN PAIRS	-	-	7.5	11.2	8.5
13	10			-	-	9.5	14	-
16	8			-	-	11.2	17	12.5
16	10			-	-	14	21.2	-
19	8			-	-	16	23.6	18
19	10			-	-	20	30	-
23	8			-	-	23.6	35.5	-
23	10			-	-	29.5	44	-
26	8			-	-	30	45	-
26	10			-	-	38	57	-
32	8	-	-	45	67	-		
32	10	-	-	56	85	-		

Working Load Limits are for slings as illustrated.