



Crosby® Kuplex®

Single Leg Slings



Single Leg fitted with KHN L Sling Hooks




Single Leg fitted with KS N Kuplink and KHN L Sling Hooks



Single Leg fitted with KS N Kuplinks each end



Single Leg fitted with KSS N Reeveable Link each end

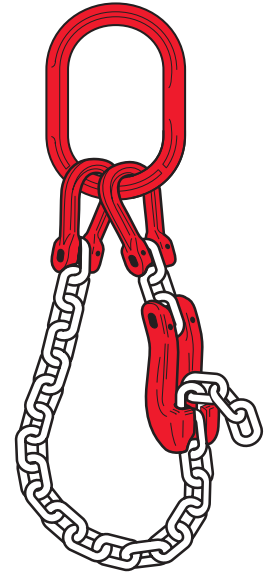

KSC Shortening Clutch in use

Basket configuration

Master Links



KM
7mm - 32mm



KSS N
7mm - 26mm



KS N
7mm - 16mm



K N
7mm - 32mm

Kupler

Shortening Clutch




KSC N
7mm - 19mm



KSC
7mm - 32mm

Terminal Fittings - Availability Chart

Chain Dia. (mm)	Grade	Working Load Limit (t.)												
		KHN L	KHX C	KHX E	KHX S	KC N	KF N	KHW N	KDN N	KDL N	KSS N	KS N	TL N	
7	8	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
7	10	2	2	2	2	2	2	2	2	2	2	2	-	
8	8	2	2	2	2	2	2	2	2	2	2	2	2	
10	8	3.15	3.15	3.15	3.15	3.15	3.15	3.15	3.15	3.15	3.15	3.15	3.15	
10	10	4	4	4	4	4	4	4	4	4	4	4	-	
13	8	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	
13	10	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	-	
16	8	8	8	8	-	8	8	8	8	8	8	8	8	
16	10	10	10	10	-	10	10	10	10	10	10	10	-	
19	8	11.2	-	11.2	-	11.2	11.2	-	-	11.2	11.2	-	11.2	
19	10	14	-	14	-	14	14	-	-	14	14	-	-	
23	8	16	-	16	-	-	16	-	-	-	16	-	16	
23	10	21	-	21	-	-	21	-	-	-	21	-	-	
26	8	21.2	-	-	-	-	-	-	-	-	21.2	-	21.2	
26	10	27	-	-	-	-	-	-	-	-	27	-	-	
32	8	31.5	-	-	-	-	-	-	-	-	-	-	31.5	
32	10	40	-	-	-	-	-	-	-	-	-	-	-	

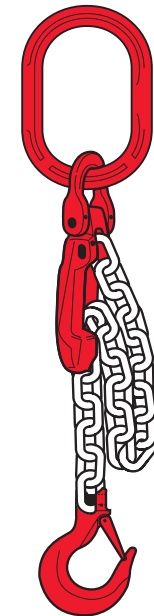

KSC N Shortening Clutch in use

Note that the loaded end of the chain must come out of the bottom of both types of clutch.