



Crosby® Kuplex®

Two Leg Slings

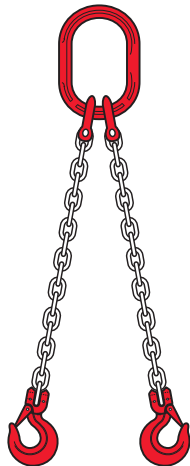

Two Leg fitted with KHN L sling hooks

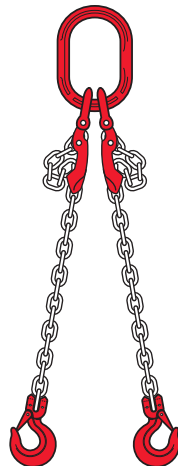

Two Leg fitted with KSC-N Shortening Clutches and KHN L sling hooks

Master Links



KM
7mm - 32mm

Kupler



KN
7mm - 32mm

Shortening Clutch



KSC N
7mm - 19mm



KSC
7mm - 32mm

Terminal Fittings - Availability Chart

Chain Dia. (mm)	Grade	Working Load Limit (t.)											
7	8	2.12	2.12	2.12	2.12	2.12	2.12	2.12	2.12	2.12	2.12	2.12	2.12
7	10	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	-
8	8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8
10	8	4.25	4.25	4.25	4.25	4.25	4.25	4.25	4.25	4.25	4.25	4.25	4.25
10	10	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	-
13	8	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5
13	10	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	-
16	8	11.2	11.2	11.2	-	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2
16	10	14	14	14	-	14	14	14	14	14	14	14	-
19	8	16	-	16	-	16	16	-	-	16	16	-	16
19	10	20	-	20	-	20	20	-	-	20	20	-	-
23	8	23.6	-	23.6	-	-	23.6	-	-	-	23.6	-	23.6
23	10	29.5	-	29.5	-	-	29.5	-	-	-	29.5	-	-
26	8	30	-	-	-	-	-	-	-	-	30	-	30
26	10	38	-	-	-	-	-	-	-	-	38	-	-
32	8	45	-	-	-	-	-	-	-	-	-	-	45
32	10	56	-	-	-	-	-	-	-	-	-	-	-

Working Load Limits are for Two Leg Slings at 0° to 45°